
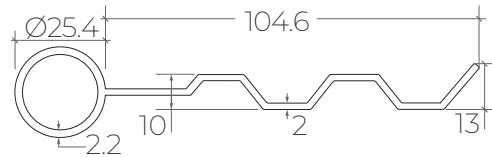


VALO PROFILE

ACCESSORIES-880564

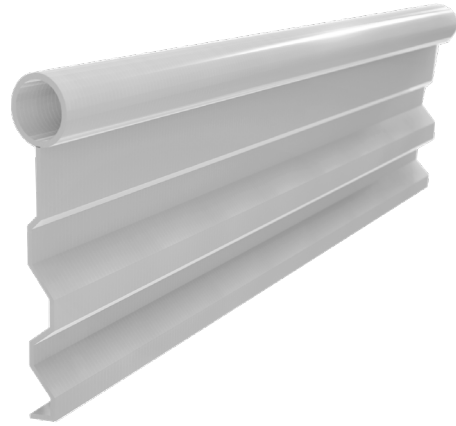

Valo Profile is used for providing physical separation among lawn, lighting, over and mulch (gravel, wood and bark).

Valo Profile is manufactured using LDPE. The structure in the cross - section below consists of a rounded edge at one end and corrugated section at the other. The corrugated section is inserted into the ground in such a way that the rounded end acts as an edge to the landscape and the corrugated part prevents plants roots from crossing. Its heavy duty and also its produced for hot climates.

PRODUCT SPECIFICATIONS

Material — Plastic

Finish — White

Mass — 369.61 g/m

Length — 5.8 Mtr

Weight — 2000g

Density — 931 Kg/m³

Melt Flow Rate — 0.2g/10 min
MFR (190°C/2.16 Kg)

Melt Flow Rate — 0.9g/10 min
MFR (190°C/5kg)

Vicat Softening Temperature — 108°C
(10N)

ESCR - 10% Igepal / F50 — >5000Hours