


ABHA-FS330010


5X30, 7.2W/M, IP65 STRIPLIGHT

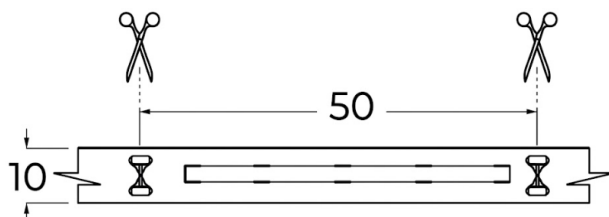

PRODUCT SPECIFICATIONS

Strip Material	Double Sided Flexible PCB
IP 65 Seal-out Material	Clear Silicone Rubber
Installation Tape	3M Strong Adhesive Stick-on Tape
Dimmability	Compatible with Phase Dimming, 0 – 10V & DALI Dimming system
Binning	3 Step MacAdam
Life Span	50,000 hours
Weight	215g

LED Chip	Samsung
Number of LEDs	150 per Reel (30 per Meter)
Power Consumption	36W (7.2W per Meter)
Input Voltage	24VDC
Single LED Wattage	0.24W
Input Voltage	24VDC
Length	5000mm
Strip Thickness	2mm
Operating Temperature	from -20° to 50° C
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
36W	2400K 2700K 3000K 4000K 6000K RED, GREEN, BLUE RGB	95lm/W	100lm/W	110lm/W	65	120°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.