


ABHA-FS330015


5X60, 14.4W/M IP65 STRIPLIGHT

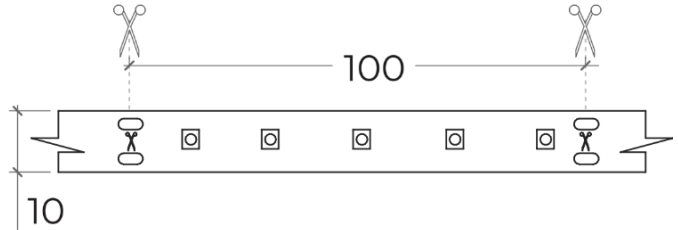

PRODUCT SPECIFICATIONS

Strip Material	Double Sided Flexible PCB
IP65 Seal-out Material	Clear Silicone Rubber
Installation Tape	3M Strong Adhesive Stick-on Tape
Dimmability	Compatible with Phase Dimming, 0 – 10V Dimming & DALI Dimming
Binning	3 Step MacAdam
Life Span	50,000 hours
Weight	220g

LED Chip	Samsung
Number of LEDs	300 per Reel (60 per Meter)
Power Consumption	72W (14.4W per Meter)
Input Voltage	24VDC
Single LED Wattage	0.24W
Input Voltage	24VDC
Length	5000mm
Strip Thickness	2mm
Operating Temperature	from -20° to 50° C
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
72W	2700K 3000K 4000K 6000K RED, GREEN, BLUE, RGB, RGBW AMBER	110lm/W	120lm/W	130lm/W	65	120°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.