


ABHA-FS330079


9.6W/m 3X120 IP68 SINGLE COLOR STRIPLIGHT

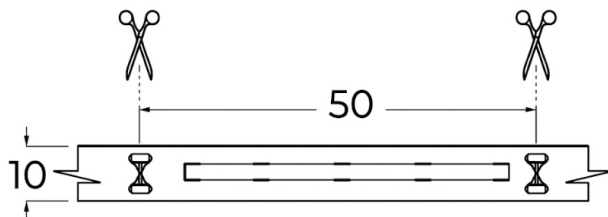

PRODUCT SPECIFICATIONS

Strip Material	Double Sided Flexible PCB
IP68 Seal-out Material	Clear Silicone Rubber
Installation Tape	3M Strong Adhesive Stick-on Tape
Dimmability	Compatible with Phase Dimming, 0 – 10V Dimming & DALI Dimming
Binning	3 Step MacAdam
Life Span	50,000 hours

LED Chip	Samsung
Number of LEDs	600 per Reel (120 per Meter)
Power Consumption	48W (5m) 96W (10m)
Input Voltage	24VDC
Single LED Wattage	0.08W
Input Voltage	24VDC
Length	10m or 5m
Strip Thickness	4.5mm
Operating Temperature	from -20° to 50° C
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
48W	2400K 2700K 3000K 4000K 6000K RED, GREEN, BLUE RBG+W(2700K-6000K)	110lm/W	120lm/W	130lm/W	68	120°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.