




CAHAYA-WL220742

5W SURFACE STEP LIGHT

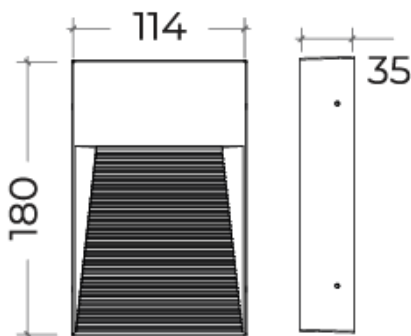

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast Aluminum
Fixture Finish	Powder-coated black
Optic	High temperature Japanese Acrylic
Diffuser	Frosted polycarbonate
Sleeve Material	Black Polycarbonate
Driver	Built-in
Binning	3 Step MacAdam
Life Span	50,000 hours

LED Chip	CREE
Power Consumption	5W
Input Voltage	180~240V AC, 50/60Hz
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Driver Protection	Short Circuit
Warranty	3 years against manufacturing defects
Agency Approval	CE ,RoHS



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
5W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	65	70°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.