


FOTIS-SP220004

12W LED SPIKE LIGHT

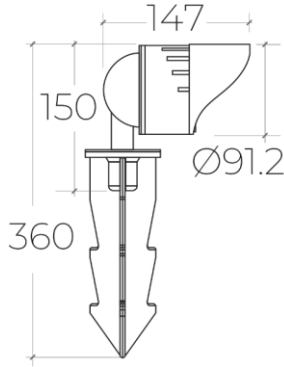

PRODUCT SPECIFICATIONS

Fixture Material	Die cast Aluminum	LED Chip	Nichia
Fixture Finish	Powder-coated bronze	Power Consumption	12W
Glass	Clear Glass	Input Voltage	12VAC, 50/60 Hz or 12VDC
Optic	High temperature Japanese Acrylic	Operating Temperature	from -20° to 65° C
Cowl Material	Die cast Aluminum	Color Rendering Index	≥85
Binning	3 Step MacAdam	Warranty	3 years against manufacturing defects
Wiring	1 meter of 2 core 0.75mm ² rubber cable	Agency Approval	CE, RoHS, ETL
Life Span	50,000 hours	Power Factor	>0.8



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
12W	2700K 3000K 4000K 6000K RED GREEN BLUE	110lm/W	120lm/W	130lm/W	66	10° 35° 60°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.

ACCESSORIES

SPIKE



Spike for mounting fixture in the soil (default mounting accessory supplied with the fixture).

WALL MOUNT BRACKET



Wall mount bracket, can be used to mount fixture on posts, trees or walls (sold separately).

TREE STRAP



Combination of die-cast aluminum mounting bracket and rubber strap. Provides versatile tree mounting for spike lights without damaging trees and their growth.