


## FOTIS-SP220156


### 15W COMPACT SPIKE LIGHT

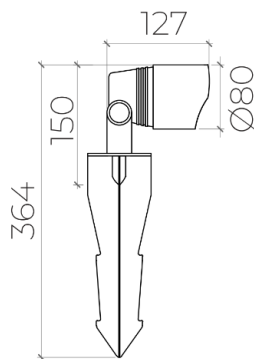

### PRODUCT SPECIFICATIONS

Fixture Material	Die cast solid brass
Fixture Finish	Brass
Glass	Clear Glass
Optic	High temperature Japanese Acrylic
Binning	3 Step MacAdam
Wiring	1 meter of 2 core 0.75mm <sup>2</sup> rubber cable
Life Span	50,000 hours

LED Chip	Nichia
Power Consumption	15W
Input Voltage	12VAC, 50/60 Hz or 12VDC
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Weight	1674g
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS, ETL



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
15W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	66	10° 35° 60°

#### Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.

## ACCESSORIES

---

### SPIKE

---



Spike for mounting fixture in the soil (default mounting accessory supplied with the fixture).

### WALL MOUNT BRACKET

---



Wall mount bracket, can be used to mount fixture on posts, trees or walls (sold separately).

