




KOUKI-PL550026

40W POLE LIGHT

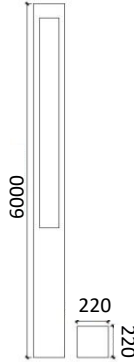

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast Aluminium
Fixture Finish	Powder-coated grey
Glass	Clear Glass
Driver	Built-in
Binning	3 Step MacAdam
Wiring	1 meter of 3 core 1.5 mm ² rubber cable
Life Span	50,000 hours

LED Chip	CREE
Power Consumption	40W
Input Voltage	180~240V AC, 50/60Hz
Height	6 meters
Operating Temperature	from -20° to 65° C
Color Rendering Index	>80
Driver Protection	Short circuit
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
40W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	65	120°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.