




**GLOBAL LIGHT  
& POWER LLC**  
AN LED LIGHTING COMPANY

## LANA-DL111212


### 10W TRIMLESS RECESSED DIRECTIONAL DOWNLIGHT

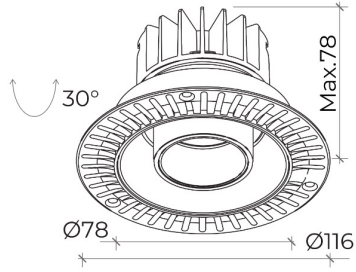

### PRODUCT SPECIFICATIONS

|                      |                                                                         |
|----------------------|-------------------------------------------------------------------------|
| Fixture Material     | Die-cast aluminum                                                       |
| Trim Finish          | Powder-coated white                                                     |
| Reflector/Optic/Lens | Anti-glare optical lens                                                 |
| Driver               | External                                                                |
| Dimmability          | Standard phase dimming. Also available in 0-10V and DALI dimming system |
| Binning              | 3 Step MacAdam                                                          |
| Life Span            | 50,000 hours                                                            |

|                       |                                       |
|-----------------------|---------------------------------------|
| LED Chip              | LUMINUS COB                           |
| Input Voltage         | 180~240VAC, 50/60Hz                   |
| Color Rendering Index | >85                                   |
| Driver Protection     | Short circuit                         |
| Operating Temperature | -20° to 50°C                          |
| Warranty              | 5 years against manufacturing defects |
| Agency Approval       | CE, RoHS                              |
| Weight                | 450g                                  |
| Cut out               | Ø90mm                                 |



| Power (W) | Available color Temperatures | LED Chip Lumen Efficacy |        |        | Power Factor | Available Beam Angles |
|-----------|------------------------------|-------------------------|--------|--------|--------------|-----------------------|
|           |                              | 3000K                   | 4000K  | 6000K  |              |                       |
| 10W       | 2700K<br>3000K<br>4000K      | 80lm/W                  | 85lm/W | 90lm/W | > 0.8        | 24°<br>36°<br>60°     |

#### Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.