




LIGERO-FX110448

40W SURFACE MOUNTED BATTEN LIGHT

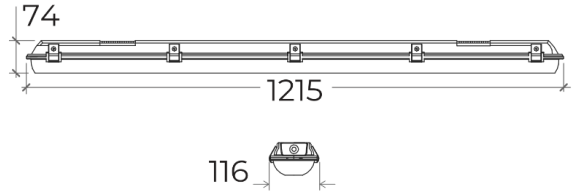

PRODUCT SPECIFICATIONS

Fixture Material	Compression moulded glass
Fixture Finish	Material Gray
Diffuser	UV resistant Frosted polycarbonate
Driver	Built-in
Binning	3 Step MacAdam
Life Span	50,000 hours

LED Chip	CREE
Power Consumption	40W
Input Voltage	180-240VAC, 50/60Hz
Operating Temperature	from -20° to 50° C
Color Rendering Index	>85
Drive protection	Short circuit
Warranty	5 years against manufacturing defects
Agency Approval	CE, RoHS
Weight	1950g



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			Power Factor	Available Beam Angles
		3000K	4000K	6000K		
40W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	> 0.8	120°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.