




LIGERO-LP110426

40W SURFACE MOUNTED BATTEN LIGHT

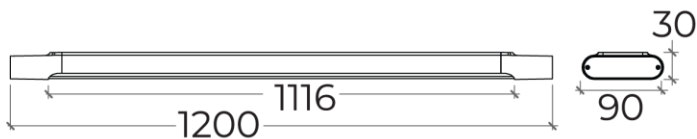

PRODUCT SPECIFICATIONS

| | |
|------------------|------------------------------------|
| Fixture Material | Polycarbonate |
| Fixture Finish | White |
| Diffuser | UV resistant Frosted polycarbonate |
| Driver | Built-in |
| Binning | 3 Step MacAdam |
| Life Span | 50,000 hours |

| | |
|-----------------------|---------------------------------------|
| LED Chip | CREE |
| Power Consumption | 40W |
| Input Voltage | 180~240VAC, 50/60Hz |
| Operating Temperature | from -20° to 50° C |
| Color Rendering Index | >85 |
| Drive protection | Short circuit |
| Warranty | 5 years against manufacturing defects |
| Agency Approval | CE, RoHS |
| Weight | 1700g |



| Power (W) | Available color Temperatures | LED Chip Lumen Efficacy | | | Power Factor | Available Beam Angles |
|-----------|----------------------------------|-------------------------|---------|---------|--------------|-----------------------|
| | | 3000K | 4000K | 6000K | | |
| 40W | 2700K 3000K 4000K 6000K | 110lm/W | 120lm/W | 130lm/W | > 0.8 | 120° |

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.