




LIGERO-SM111184

40W SURFACE MOUNTED BATTERN LIGHT

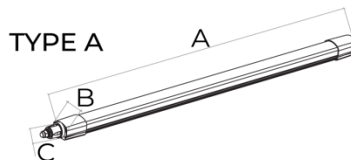

Power	A*B*C	Weight
20W:	600*70*57	0.55kg
40W:	1200*70*57	0.85kg
48W:	1500*70*57	1kg

PRODUCT SPECIFICATIONS

Fixture Material	Polycarbonate
Fixture Finish	Powder coated gray
Diffuser	UV resistant frosted polycarbonate
Driver	Built-in
Dimmability	Non-dimmable
Binning	3 Step MacAdam
Life Span	50,000 hours

LED Chip	CREE 2835 SMD
Power Consumption	40W
Input Voltage	180-240VAC, 50/60Hz
Operating Temperature	from -20° to 50° C
Color Rendering Index	>85
Drive protection	Short circuit
Warranty	5 years against manufacturing defects
Agency Approval	CE, RoHS
Weight	800g



Available Power (W) & Dimension (A*B*C)	Weight	Available color Temperatures	LED Chip Lumen Efficacy			Power Factor	Available Beam Angles
			3000K	4000K	6000K		
20W: 600*70*57 40W: 1200*70*57 48W: 1500*70*57	0.55kg 0.85kg 1kg	2700K 3000K 4000K	110lm/W	120lm/W	130lm/W	> 0.8	120°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.