


LUCIO-DW220247

4W RECESSED TWO SIDED DRIVEWAY LIGHT

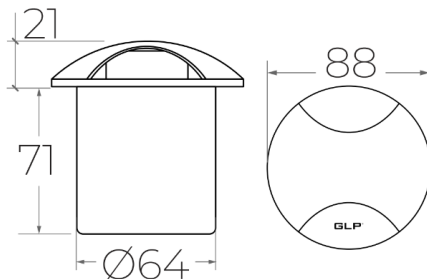

PRODUCT SPECIFICATIONS

Fixture Material	Grade 316 Stainless Steel
Fixture Finish	Polished Stainless Steel
Sleeve Material	Black Polycarbonate
Diffuser	Clear UV resistant polycarbonate
Static Load Pressure	2500kg
Driver	Built-in
Driver protection	Short circuit
Binning	3 Step MacAdam
Wiring	1 Meter of 3core 0.5mm ² rubber cable
Life Span	50,000 hours

LED Chip	Nichia
Power Consumption	4W
Input Voltage	180-250VAC, 50/60 Hz. Also available in 12VAC, 50/60 Hz or 12VDC (IP67)
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Driver Protection	Short circuit
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
4W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	67	2x90°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.