




## LUCIO-DW220247


### 4W RECESSED TWO-SIDED DRIVEWAY LIGHT

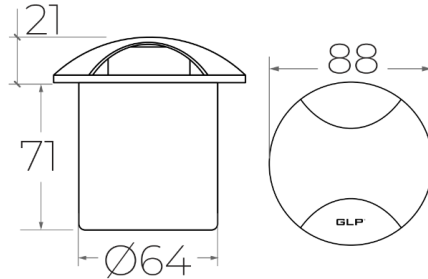

### PRODUCT SPECIFICATIONS

Fixture Material	Grade 316 Stainless Steel
Fixture Finish	Polished Stainless Steel
Sleeve Material	Black Polycarbonate
Diffuser	Clear UV resistant polycarbonate
Static Load Pressure	2500kg
Driver	Built-in
Driver protection	Short circuit
Binning	3 Step MacAdam
Wiring	1 Meter of 3core 0.5mm <sup>2</sup> rubber cable
Life Span	50,000 hours

LED Chip	Nichia
Power Consumption	4W
Input Voltage	180-250VAC, 50/60 Hz. Also available in 12VAC, 50/60 Hz or 12VDC (IP67)
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Driver Protection	Short circuit
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
4W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	65	2x90°

#### Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.