


LUCIO-DW220331

2W RECESSED ONE SIDED DRIVEWAY LIGHT

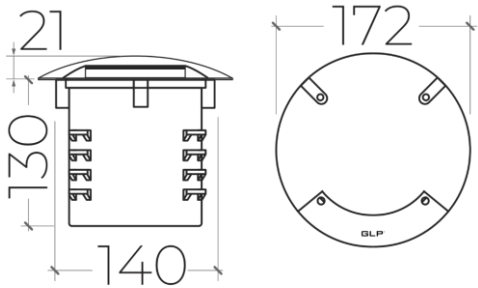

PRODUCT SPECIFICATIONS

Trim Material	Grade 316 Stainless Steel	LED Chip	Nichia
Trim Finish	Polished Stainless steel	Power Consumption	2W
Fixture Material	Die-cast Aluminum	Input Voltage	12VAC, 50/60 Hz or 12VDC
Sleeve Material	Black polycarbonate	Operating Temperature	from -20° to 65° C
Diffuser	Clear UV resistant polycarbonate	Color Rendering Index	>85
Static Load Pressure	2500kg	Warranty	3 years against manufacturing defects
Binning	3 Step MacAdam	Agency Approval	CE, RoHS
Wiring	1 meter of 2 core 0.82mm ² rubber cable		
Life Span	50,000 hours		



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
2W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	67	120°

Standard option.
 Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.



**GLOBAL LIGHT
& POWER LLC**
AN LED LIGHTING COMPANY

ACCESSORIES

POLYCARBONATE SLEEVE

Black Polycarbonate material sleeve
to be used with the Driveway light.

