




LUCIO-DW220332


4W RECESSED TWO-SIDED DRIVEWAY LIGHT

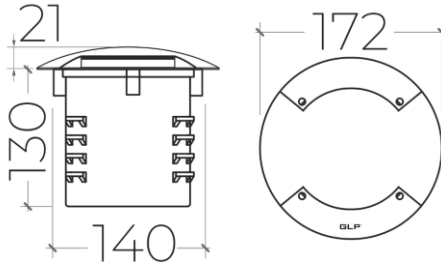

PRODUCT SPECIFICATIONS

Trim Material	Grade 316 Stainless Steel
Trim Finish	Polished Stainless steel
Fixture Material	Die-cast Aluminum
Sleeve Material	Black polycarbonate
Diffuser	Clear UV resistant polycarbonate
Static Load Pressure	2500kg
Binning	3 Step MacAdam
Wiring	1 meter of 2 core 0.82mm ² rubber cable
Life Span	50,000 hours

LED Chip	Nichia
Power Consumption	4W
Input Voltage	12VAC, 50/60 Hz or 12VDC
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
4W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	67	2x120°



**GLOBAL LIGHT
& POWER LLC**
AN LED LIGHTING COMPANY

ACCESSORIES

POLYCARBONATE SLEEVE

Black Polycarbonate material sleeve
to be used with the Driveway light.

