GLOBAL LIGHT & POWER LLC
AN LED LIGHTING COMPANY

LUCIO-**DW221049**

12W RECESSED ONE SIDED 180° OPENING DRIVEWAY LIGHT

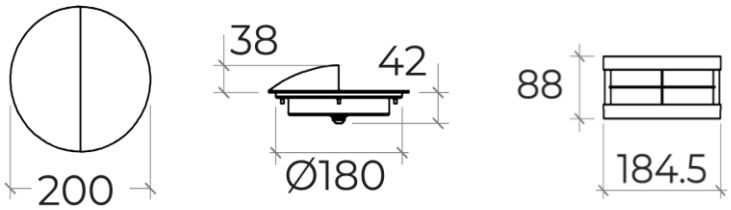

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast Aluminum
Trim Material	Grade 316L Stainless steel
Trim Finish	Polished Stainless steel
Sleeve Material	Black Polycarbonate
Glass	Tempered Glass
Static Load Pressure	2500 kg
Driver protection	Short circuit
Binning	3 Step MacAdam
Life Span	50,000 hours

LED Chip	CREE
Power Consumption	12W
Input Voltage	24 VDC
Size	Ø200mm x H120mm
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS

IP67 CE RoHS PHOTOMETRICS

Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
12W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	67	10° 15° 20° 30° 38° 60°

Standard option.
Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.

www.globallightllc.com • info@globallightllc.com • Tel: +971 4 340 44 58 • Fax: +971 4 341 10 90