




**GLOBAL LIGHT
& POWER LLC**
AN LED LIGHTING COMPANY

LUZIA-LP110311


RECESSED LINEAR LIGHT

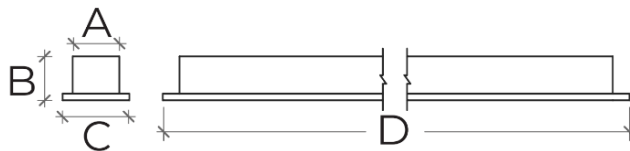

PRODUCT SPECIFICATIONS

Fixture Material	Aluminum
Fixture Finish	Powder-coated black, also available in white
Diffuser	Opal Polycarbonate
Driver	Built-in
Binning	3 Step MacAdam
Life Span	50,000 hours
Accessories	Not required

LED Chip	OSRAM
Available power & dimension (A*B*C*D)	12W – 35*35*60*600 24W – 35*35*50*1000 36W – 35*35*50*1500
Input Voltage	180~240VAC, 50/60Hz
Operating Temperature	from -20° to 50° C
Color Rendering Index	>85
Warranty	5 years against manufacturing defects
Agency Approval	CE, RoHS
Weight	1200g
Cut out	L1005-1010XW35-40mm



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			Power Factor	Available Beam Angles
		3000K	4000K	6000K		
12W 24W 36W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	> 0.9	120° 270°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.