




**GLOBAL LIGHT
& POWER LLC**
AN LED LIGHTING COMPANY

MORCAN-UR220091


4.5W RECESSED MOUNTED UNDERWATER LIGHT

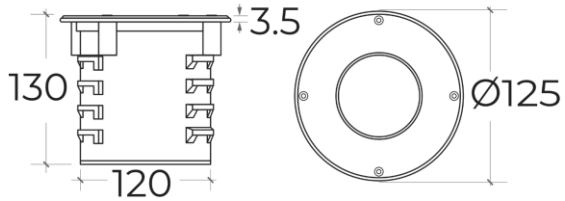

PRODUCT SPECIFICATIONS

Trim Material	Grade 316 stainless steel
Trim Finish	Polished stainless steel
Glass	Semi frosted UV resistant polycarbonate
Fixture Material	Die-cast Aluminum
Optic	High temperature Japanese Acrylic
Sleeve Material	Black Polycarbonate
Binning	3 Step MacAdam
Wiring	6 meter of 2 core 0.82 mm ² rubber cable
Life Span	50,000 hours

LED Chip	Nichia
Power Consumption	4.5W
Input Voltage	12VAC, 50/60 Hz or 12VDC
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS, ETL



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
4.5W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	65	35° 60°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.

ACCESSORIES

POLYCARBONATE SLEEVE

Black Polycarbonate material sleeve
to be used with recessed underwater
light.

