




MORCAN-UR220093

12W RECESSED UNDERWATER LIGHT

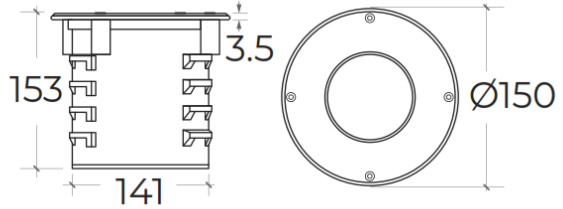

PRODUCT SPECIFICATIONS

Trim Material	Grade 316 stainless steel
Trim Finish	Polished stainless steel
Glass	Semi frosted UV resistant polycarbonate
Fixture Material	Die-cast Aluminum
Optic	High temperature Japanese Acrylic
Sleeve Material	Black Polycarbonate
Binning	3 Step MacAdam
Wiring	6 meter of 2 core 0.82mm ² rubber cable
Life Span	50,000 hours

LED Chip	Nichia
Power Consumption	12W
Input Voltage	12VAC, 50/60 Hz or 12VDC
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS, ETL



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
12W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	68	35° 60°


Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.

ACCESSORIES

POLYCARBONATE SLEEVE

Black Polycarbonate material sleeve to be used with recessed underwater light.



Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.