


## MORCAN-UR220386

### 20W STAINLESS STEEL RECESSED MOUNTED UNDERWATER FOUNTAIN LIGHT

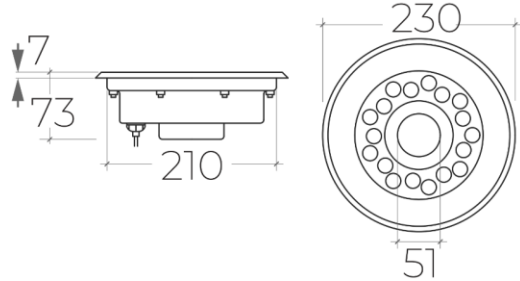

### PRODUCT SPECIFICATIONS

|                   |                                                   |
|-------------------|---------------------------------------------------|
| Trim Material     | Grade 316 Stainless Steel                         |
| Trim Finish       | Polished Stainless steel                          |
| Glass             | Clear Glass                                       |
| Fixture Material  | Die-cast aluminum                                 |
| Fixture Finish    | Polished Stainless steel                          |
| Optic             | Acrylic Optical Lens                              |
| Binning           | 3 Step MacAdam                                    |
| Input Wiring      | 3 Meter of 2 core 1.5mm <sup>2</sup> rubber cable |
| RGB Signal Wiring | 3 Meter of 3 core 1.5mm <sup>2</sup> rubber cable |
| Life Span         | 50,000 hours                                      |

|                       |                                       |
|-----------------------|---------------------------------------|
| LED Chip              | CREE                                  |
| Power Consumption     | 20W                                   |
| Input Voltage         | 12VAC 50/60Hz or 12VDC<br>RGB - 24VDC |
| Operating Temperature | from -20° to 65° C                    |
| Color Rendering Index | >85                                   |
| Warranty              | 3 years against manufacturing defects |
| Agency Approval       | CE, RoHS                              |



| Power (W) | Available color Temperatures            | Luminous Flux |         |         | IP Rating | Available Beam Angles |
|-----------|-----------------------------------------|---------------|---------|---------|-----------|-----------------------|
|           |                                         | 3000K         | 4000K   | 6000K   |           |                       |
| 20W       | 2700K<br>3000K<br>4000K<br>6000K<br>RGB | 110lm/W       | 120lm/W | 130lm/W | 68        | 15°                   |

#### Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.