


# POWER SUPPLIES AND ACCESSORIES

## MW 24VDC CONSTANT VOLTAGE POWER SUPPLIES

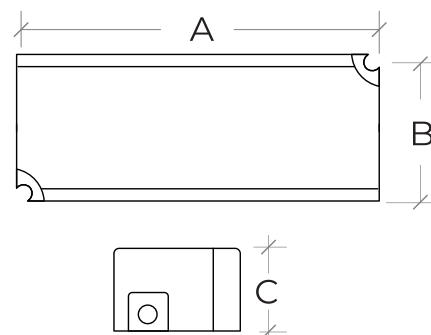

Code	Power(W)	Size (mm) AxBxC	Output Current (A)	IP Rating	Input-voltage & frequency	Dimming options	Weight (g)
770161	60	150x53x35	2.5	67	90-305VAC, 47-63Hz	DALI, 0-10V	490
770198	90	171x63x37.5	3.75				780
770160	120	191x63x37.5	5				900
770168	200	195x68x39.5	8.3				1030
770098	100	229x44x70	4		100-360VAC, 47-63Hz	0-10V Dimmable	750
770096	240	245x38x70	10	65	100-305VAC, 47-63Hz	Non-dimmable	1160

### PRODUCT SPECIFICATIONS

Output voltage	Constant 24V DC	<b>Features:</b> <ul style="list-style-type: none"> <li>Constant Voltage PWM style output</li> <li>Emergency lighting application is available according to IEC61347-2-13</li> <li>Typical lifetime &gt;50000 hours and 3 years warranty</li> </ul>
Operating temperature	from -20° to 50° C	
Lifespan	50,000 hours	
Driver protection	<ul style="list-style-type: none"> <li>Short circuit</li> <li>Over voltage</li> <li>Heat protection</li> </ul>	



Standard option Non-standard products may be subject to MOQ, Contact your regional sales representative for more information.

GLP® reserves the right to change product specifications and designs without prior notice.