




NADRA-TR111250


5W MAGNETIC TRACK LIGHT

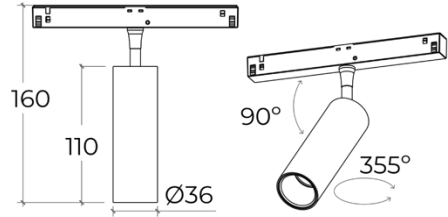

PRODUCT SPECIFICATIONS

| | |
|------------------------|---|
| Fixture Material | Die-cast aluminum |
| Trim Finish | Powder coated black. Also available in white. |
| Reflector/Optical/lens | Anti-glare optical lens |
| Glass/Diffuser | Clear glass |
| Driver | Internal |
| Binning | 3 Step MacAdam |
| Life Span | 50,000 hours |

| | |
|-----------------------|---------------------------------------|
| LED Chip | CREE |
| Input Voltage | 48VDC |
| Color Rendering Index | >85 |
| Driver Protection | Short circuit |
| Operating Temperature | -20° to 50°C |
| Warranty | 5 years against manufacturing defects |
| Agency Approval | CE, RoHS |
| Weight | 260g |



| Power (W) | Available color Temperatures | LED Chip Lumen Efficacy | | | Power Factor | Available Beam Angles |
|-----------|----------------------------------|-------------------------|---------|---------|--------------|-----------------------|
| | | 3000K | 4000K | 6000K | | |
| 5W | 2700K 3000K 4000K 6000K | 100lm/W | 110lm/W | 120lm/W | > 0.8 | 15° 24° 36° 60° |

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.