




**GLOBAL LIGHT
& POWER LLC**
AN LED LIGHTING COMPANY

NATELA-WW440107

36W LINEAR WALL WASHER

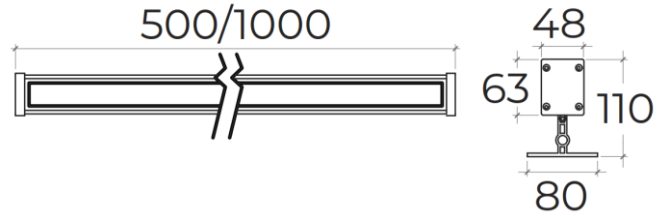

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast Aluminium
Fixture Finish	Powder-coated Gray
Glass	High intensity Tempered Glass
Optic	Acrylic Optical lens
Driver	Built-in
Binning	3 Step MacAdam
Input Wiring	1 Meter of 2 core 0.75mm ² rubber cable
RGB Signal Wiring	1 Meter of 3 core 0.75mm ² rubber cable
Life Span	50,000 hours

LED Chip	CREE
Power Consumption	36W
Input Voltage	24VDC also available in 180-240VAC 50/60Hz
Length	1000mm also available in 500mm
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Driver Protection	Short circuit
Warranty	3 years against manufacturing defects
Agency Approval	CE , RoHS



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
36W	2700K 3000K 4000K 6000K RGB	110lm/W	120lm/W	130lm/W	66	10° 20° 35° 60°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.