




NURU-FL440128


400W & 500W SQUARE FLOOD LIGHT

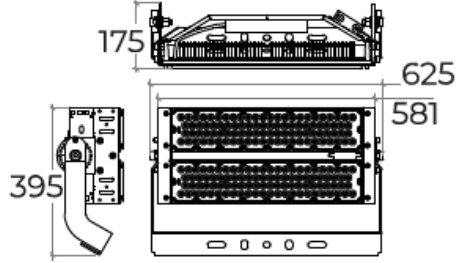

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast aluminum
Fixture Finish	Powder-coated black
Lens	Clear acrylic high temperature optics
Diffuser	Clear UV resistant Polycarbonate
Cowl	Available upon request
Binning	3 Step MacAdam
Wiring	1 meter of 3 core 1.5mm rubber cable
Life Span	50,000 hours

LED Chip	Philips
Power Consumption	400W & 500W
Input Voltage	180~240V AC, 50/60Hz
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Driver Protection	Short circuit
Warranty	3 years against manufacturing defects
Agency Approvals	CE, RoHS



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
400W 500W	2700K 3000K 4000K 6000K	130lm/W	150lm/W	150lm/W	66	60° 90° Asymmetrical

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.