




**GLOBAL LIGHT
& POWER LLC**
AN LED LIGHTING COMPANY

NURU-FL440189

100W FLOOD LIGHT

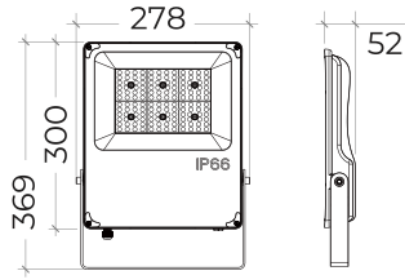

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast aluminum
Fixture Finish	Powder-coated black
Glass	High-Intensity Tempered glass
Reflector	Polycarbonate with aluminum coating
Binning	3 Step MacAdam
Wiring	1 meter of 3 core 0.75mm rubber cable
Life Span	108,000 hours

LED Chip	Philips
Power Consumption	50W
Input Voltage	180~240V AC, 50/60Hz
Operating Temperature	from -40° to 50° C
Color Rendering Index	>85
Driver Protection	Short circuit
Warranty	3 years against manufacturing defects
Agency Approvals	CE, RoHS



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy		IP Rating	Available Beam Angles
		2200K	6500K		
50W	2200K-6500K	165lm/W	170lm/W	66	7° 15° 30° 60° 90° 120°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.