


NURU-FL440209

48W LED FLOOD LIGHT WITH ADJUSTABLE MOUNTING BRACKET

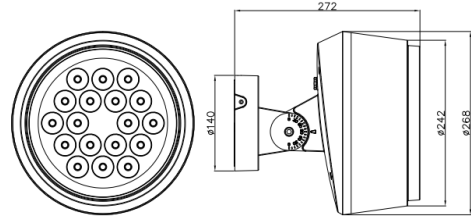

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast Aluminium
Fixture Finish	Powder-coated Gray ral 9023
Glass	High intensity tempered glass
Optic	Acrylic Optical lens
Driver	External
Binning	3 Step MacAdam
Wiring	3 meter of 3 core 1.5 mm ² rubber cable
Life Span	50,000 hours

LED Chip	CREE
Power Consumption	48W
Input Voltage	180~250V AC, 50/60Hz
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Driver Protection	Short Circuit
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
48W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	66	60°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.