




**GLOBAL LIGHT
& POWER LLC**
AN LED LIGHTING COMPANY

SANA-SM110401

15W SURFACE MOUNTED DOWNLIGHT

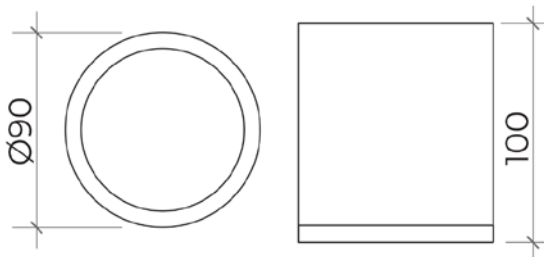

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast aluminum
Trim Finish	Powder coated white. Also available in black
Reflector	Polycarbonate with aluminum coating reflector
Glass/Diffuser	Clear glass
Driver	Built-in
Dimmability	Non-Dimmable. Also available in Standard Phase Dimming
Binning	3 Step MacAdam
Life Span	50,000 hours

LED Chip	CREE COB
Input Voltage	180~240VAC, 50/60Hz
Color Rendering Index	>85
Driver Protection	Short circuit
Operating Temperature	-20! to 50!C
Warranty	5 years against manufacturing defects
Agency Approval	CE, RoHS
Weight	520g



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			Power Factor	Available Beam Angles
		3000K	4000K	6000K		
15W	2700K 3000K 4000K 6000K	80lm/W	85lm/W	90lm/W	> 0.8	60°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.