




**GLOBAL LIGHT
& POWER LLC**
AN LED LIGHTING COMPANY

STE-H-FL111160

15W FLOOR STANDING LIGHT

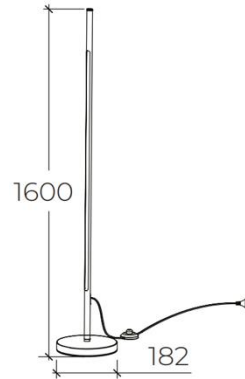

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast aluminum
Trim Finish	Powder coated black
Glass/Diffuser	Frosted PC diffuser
Driver	Internal
Dimmability	0% -100% Dimmable with remote controller
Binning	3 Step MacAdam
Life Span	50,000 hours

LED Chip	CREE COB
Input Voltage	180~240VAC, 50/60Hz
Color Rendering Index	>80
Driver Protection	Short circuit
Operating Temperature	-20° to 50°C
Warranty	5 years against manufacturing defects
Agency Approval	CE



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
15W	Tunable 2700 – 6000K	80lm/W	85lm/W	90lm/W	20	120°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.