


ZIYA-RU220023

8.5W RECESSED UP LIGHT

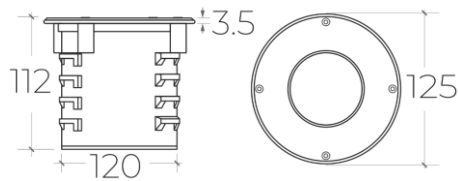

PRODUCT SPECIFICATIONS

Trim Material	Grade 316 stainless steel	LED Chip	Nichia
Trim Finish	Polished stainless steel	Power Consumption	8.5W
Glass	Frosted UV resistant polycarbonate	Input Voltage	12VAC, 50/60 Hz or 12VDC
Fixture Material	Die-cast Aluminum	Operating Temperature	from -20° to 65° C
Optic	High temperature Japanese Acrylic	Color Rendering Index	>85
Sleeve Material	Black polycarbonate	Warranty	3 years against manufacturing defects
Static Load Pressure	2500kg	Agency Approval	CE, RoHS, ETL
Binning	3 Step MacAdam		
Wiring	1 meter of 2 core 0.82mm ² rubber cable		
Life Span	50,000 hours		



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
8.5W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	67	35° 60°

Standard option.
Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.



**GLOBAL LIGHT
& POWER LLC**
AN LED LIGHTING COMPANY

ACCESSORIES

POLYCARBONATE SLEEVE

Black Polycarbonate material sleeve
to be used with recessed up light.

