


ZIYA-RU220023

8.5W RECESSED UP LIGHT

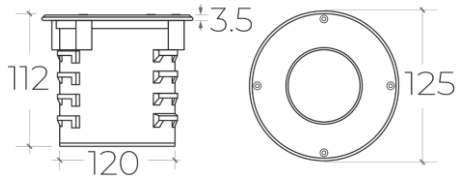

PRODUCT SPECIFICATIONS

Trim Material	Grade 316 stainless steel
Trim Finish	Polished stainless steel
Glass	Semi-Frosted UV resistant polycarbonate
Fixture Material	Die-cast Aluminum
Optic	High temperature Japanese Acrylic
Sleeve Material	Black polycarbonate
Static Load Pressure	2500kg
Binning	3 Step MacAdam
Wiring	1 meter of 2 core 0.82mm ² rubber cable
Life Span	50,000 hours

LED Chip	Nichia
Power Consumption	8.5W
Input Voltage	12VAC, 50/60 Hz or 12VDC
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS, ETL
Weight	1038g



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
8.5W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	67	35° 60°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.



**GLOBAL LIGHT
& POWER LLC**
AN LED LIGHTING COMPANY

ACCESSORIES

POLYCARBONATE SLEEVE

Black Polycarbonate material sleeve
to be used with recessed up light.

