


ZIYA-RU220024

12W RECESSED UP LIGHT

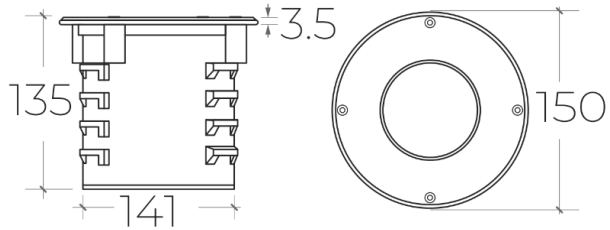

PRODUCT SPECIFICATIONS

Fixture & Trim Material	Grade 304 stainless steel	LED Chip	Nichia
Trim Finish	Polished stainless steel	Power Consumption	12W
Glass/Diffuser	Semi- frosted UV resistant polycarbonate	Input Voltage	12VAC, 50/60 Hz or 12VDC
Optic	High temperature Japanese Acrylic	Operating Temperature	from -20° to 50° C
Sleeve Material	Black polycarbonate	Color Rendering Index	>85
Static Load Pressure	2500kg	Warranty	3 years against manufacturing defects
Binning	3 Step MacAdam	Agency Approval	CE, RoHS, ETL
Wiring	1 meter of 2 core 0.82mm ² wire	Weight	1038g
Life Span	50,000 hours		



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
12W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	67	35° 60°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.

ACCESSORIES

POLYCARBONATE SLEEVE

Black Polycarbonate material sleeve
to be used with recessed up light.

