




ZIYA-RU220024

12W RECESSED UP LIGHT

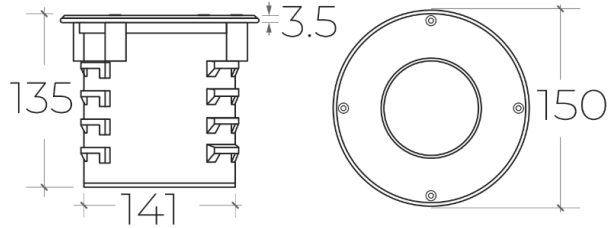

PRODUCT SPECIFICATIONS

| | |
|----------------------|--|
| Fixture Material | Die-cast aluminum |
| Trim Material | Grade 316 stainless steel |
| Trim Finish | Polished stainless steel |
| Glass/Diffuser | Semi- frosted UV resistant polycarbonate |
| Optic | High temperature Japanese Acrylic |
| Sleeve Material | Black polycarbonate |
| Static Load Pressure | 2500kg |
| Binning | 3 Step MacAdam |
| Wiring | 1 meter of 2 core 0.82mm ² wire |
| Life Span | 50,000 hours |

| | |
|-----------------------|---------------------------------------|
| LED Chip | Nichia |
| Power Consumption | 12W |
| Input Voltage | 12VAC, 50/60 Hz or 12VDC |
| Operating Temperature | from -20° to 65° C |
| Color Rendering Index | >85 |
| Warranty | 3 years against manufacturing defects |
| Agency Approval | CE, RoHS, ETL |
| Weight | 1038g |



| Power (W) | Available color Temperatures | Luminous Flux | | | IP Rating | Available Beam Angles |
|-----------|----------------------------------|---------------|---------|---------|-----------|-----------------------|
| | | 3000K | 4000K | 6000K | | |
| 12W | 2700K 3000K 4000K 6000K | 110lm/W | 120lm/W | 130lm/W | 67 | 35° 60° |

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.



ACCESSORIES

POLYCARBONATE SLEEVE

Black Polycarbonate material sleeve
to be used with recessed up light.

