


ZIYA-RU220328

16W RECESSED UP LIGHT WITH TILT ANGLE

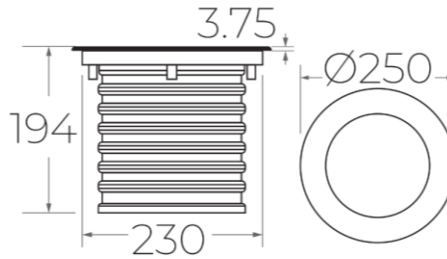

PRODUCT SPECIFICATIONS

Trim Material	Grade 316 Stainless steel
Trim Finish	Polished Stainless Steel
Glass	Clear glass
Fixture Material	Die-cast Aluminum
Optic	High temperature Japanese acrylic
Sleeve Material	Aluminum Alloy
Static Load Pressure	2500kg
Binning	3 Step MacAdam
Input Wiring	1 meter of 2 core 0.75mm ² rubber cable
Life Span	50,000 hours

LED Chip	CREE
Power Consumption	16W
Input Voltage	12V AC, 50/60Hz or 12VDC. Also available 180 - 240VAC 50/60Hz (IP65)
Tilt Angle	5°-10°
Operating Temperature	from -20° to 65° C
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE , RoHS



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
16W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	67	35° 60°

Standard option.

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.