



ANWAR-SM110155

12W ROUND SURFACE MOUNTED DOWN LIGHT



PRODUCT SPECIFICATIONS

Fixture Material	Aluminum Alloy
Fixture Finish	Powder-coated white
Diffuser	Frosted acrylic
Driver	External
Dimmability	Non-Dimmable. Also Available in Standard Phase Dimming.
Binning	3 Step MacAdam
Life Span	40,000 hours

LED Chip	Samsung
Power Consumption	12W
Input Voltage	180~250VAC, 50/60Hz
Operating Temperature	from -20° to 50° C
Color Rendering Index	>80
Driver Protection	Short circuit
Warranty	5 years against manufacturing defects
Agency Approval	CE, RoHS



Power (W)	Available color Temperatures	LED Chip Lumen Efficacy			Power Factor	Available Beam Angles
		3000K	4000K	6000K		
12W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	> 0.8	120°

Standard option.


Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.



DRIVER DETAILS

PRODUCT FEATURES

Model	GLI-12W-280MA-22D
Life Span	40,000 hours
Input Voltage	220~240VAC 50/60Hz
Output Voltage	15-52VDC
Output Current	280mA DC
Power Rating	12W
Power Factor (PF)	>0.9
Operating Temperature	from -20° to 50° C
Driver Protection	Short circuit
Agency Approvals	CE, RoHS

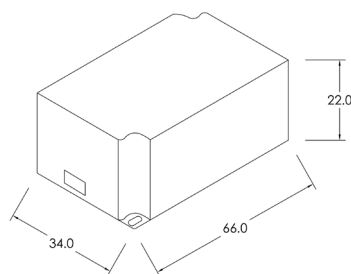

INSTALLATION GUIDE

