


CAHAYA - RW220364

6W RECESSED STEP AND WALL LIGHT

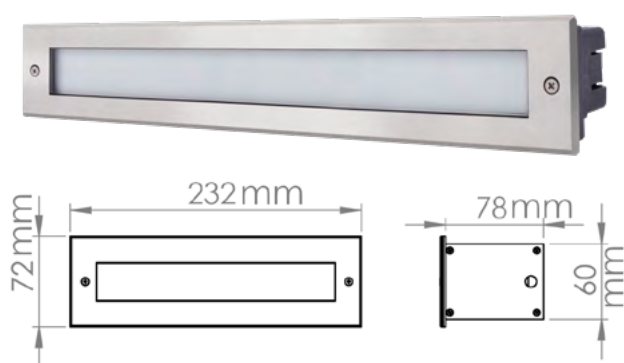

PRODUCT SPECIFICATIONS

Fixture Material	Die-cast aluminium
Trim Material	Grade 316 stainless steel
Trim Finish	Polished stainless steel
Diffuser	Opal UV resistant polycarbonate
Sleeve Material	Black polycarbonate
Driver	Built-in
LED Chip	CREE
Binning	3 step MacAdam
Wiring	30 centimeter of 3 core 1mm ² rubber cable
Lifespan	50,000 hours
Color Rendering Index	>85
Input Voltage	180-250VAC, 50/60Hz Also available in 12VAC 50/60Hz or 12VDC
Driver Protection	Short circuit
Operating Temperature	from -20° to 65°C
Warranty	3 years against manufacturing defects



Power (W)	Available Color Temperatures	Luminous Flux			IP Rating	Available Beam Angle
		3000K	4000K	6000K		
6W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	65	90°

Standard option

Non-standard products may be subject to MOQ. Contact your regional sales representative for more information.