


770016

600W Multi-Tap Transformer

A high-quality multi-tap magnetic transformer, designed and developed by lighting engineers to suit a variety of outdoor lighting applications. This transformer provides an extremely robust and flexible lighting solution due to its multiple taps and provisions for GLP timer and photocell.

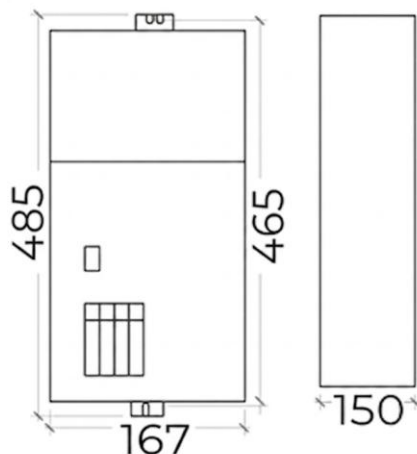

PRODUCT FEATURES

Up to 18V secondary Tap

Efficiency >93%

Epoxy encapsulated transformer resulting in silent operation and eliminating long term corrosion

Auto-resetting in-line primary overload protection

In-line secondary magnetic breaker(s) to protect against short circuit in the lighting & wiring system

Extra-large terminal blocks for ease of installation

Optional pluggable photocell and timer sockets, which allow you to add a timer and or a photocell at anytime

Primary current loop allows measurement of the primary amperage under full load

95% Regulation

5 years manufacturer warranty

PRODUCT SPECIFICATIONS

Power	600W
Input Voltage	180-250VAC, 50/60Hz
Output Voltage	12 -18V
Output Current	3 x 16A (Max)
Number of Circuit breakers	3
Regulation	96%
IP Rating	IP65
Weight	14450g

