




770017

## 1200W Multi-Tap Transformer

A high-quality multi-tap magnetic transformer, designed and developed by lighting engineers to suit a variety of outdoor lighting applications. This transformer provides an extremely robust and flexible lighting solution due to its multiple taps and provisions for GLP timer and photocell.

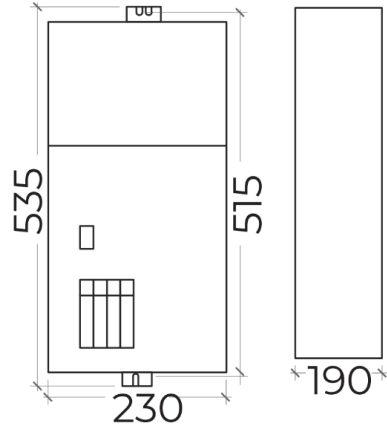

### PRODUCT FEATURES

- Up to 18V secondary Tap
- Efficiency >93%
- Epoxy encapsulated transformer resulting in silent operation and eliminating long term corrosion
- Auto-resetting in-line primary overload protection
- In-line secondary magnetic breaker(s) to protect against short circuit in the lighting & wiring system
- Extra-large terminal blocks for ease of installation
- Optional pluggable photocell and timer sockets, which allow you to add a timer and or a photocell at anytime
- Primary current loop allows measurement of the primary amperage under full load
- 96% Regulation
- 5 years manufacturer warranty

### PRODUCT SPECIFICATIONS

Power	1200W
Input Voltage	180-250VAC, 50/60Hz
Output Voltage	12-18V
Output Current	5 x 20A (Max)
Number of Circuit breakers	5
Regulation	96%
IP Rating	IP65
Weight	24850g

