

## **INSTALLATION INSTRUCTION**

**BAMBOO LIGHT** 

## Important Instructions. Please read first.





Make sure the main power is switched off during installations.

- Please follow instructions carefully. Failure to do so will void the warranty. Please ensure installation complies with local law and applicable standards.
  - 1. Only use a GLP power supply unit.
  - 2. Ensure correct input voltage is supplied to the luminaire.
  - 3. Ensure the power is disconnected before making any connections.
  - 4. Do not make modification nor alter the luminaire without written approval from GLP.
  - 5. Ensure to keep luminaire in a clean area free of debris.


## **INSTALLATION**


- Step 1: Find the location where the luminaire has to be installed. Install a suitable wiring from the power supply (12VAC) to the luminaire.
- Step 2: Fix the luminaire diffuser on the stem by rotating. Make sure the luminaire input cable is rotating with the luminaire to avoid potential damage to the luminaire input cable as illustrated.






Step 3: Fix the luminaire stem onto the stake by rotating after inserting the cable inside the stake hole. Make sure the luminaire input cable is rotating with the luminaire stem to avoid potential damage to the luminaire input cable as illustrated. Depending on type of surface raise the stake by 5cm above the surface as illustrated.









• Step 4: Connect the luminaire input cable to the main power supply (12V) cable (Do not cut the main power supply cable, just remove insulation, twist the luminaire input cable around the main cable). Ensure the junction box is installed within one meter from the luminaire as illustrated.

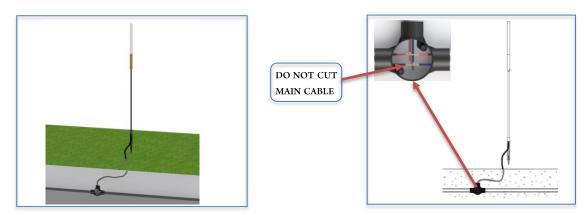



• Step 5: Solder the connections, wrap the connection with 3M waterproof tape first and then electrical tape and keep all the connections inside the junction box and put silicon on the top surface of the junction box and close the junction box with screws as illustrated.





Step 6: Fix the luminaire properly on the softscape area. Its not suitable for hardscape area.





All the Installation and Maintenance must be done by Technicians and Professional Engineers